

THREE-TERMINAL POSITIVE VOLTAGE REGULATOR

FEATURES

Maximum output current

$$I_{OM} : 1.5A$$


Output voltage

$$V_O : 10 V$$

Continuous total dissipation


$$P_D : 2W (T_J=25^{\circ}C)$$

TYPICAL APPLICATION

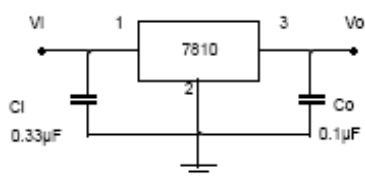

TO-220

1. IN
2. GND
3. OUT

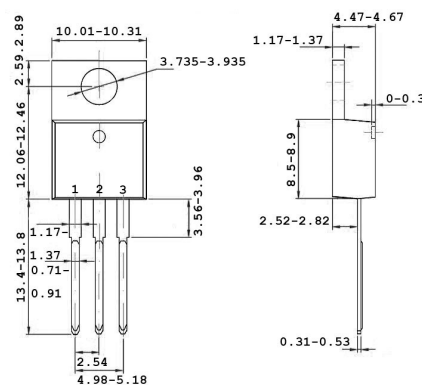

UNIT:mm

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameters	Symbols	Value	UNITS
Input Voltage	V_I	35	V
Thermal Resistance Junction - Air	$R_{\theta JA}$	65	$^{\circ}C/W$
Thermal Resistance Junction - Cases	$R_{\theta JC}$	5	$^{\circ}C/W$
Operating Junction Temperature Range	T_{OPR}	0~+150	$^{\circ}C$
Storage Temperature Range	T_{STG}	-65~+150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS

($V_I=17V$, $I_O=500mA$, $0^{\circ}C<T_J<125^{\circ}C$, $C_I=0.33\mu F$, $C_O=0.1\mu F$, unless otherwise specified)

Parameters	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	V_O	$T_J=25^{\circ}C$	9.6	10	10.4	V
		$12.5V \leq V_I \leq 25V$, $I_O=5mA-1A$, $P \leq 15W$	9.5	10	10.5	V
Load Regulation	ΔV_O	$T_J=25^{\circ}C$, $I_O=5mA-1.5A$		12	200	mV
		$T_J=25^{\circ}C$, $I_O=250mA-750mA$		4	100	mV
Line Regulation	ΔV_O	$12.5V \leq V_I \leq 28V$, $T_J=25^{\circ}C$		7	200	mV
		$14V \leq V_I \leq 20V$, $T_J=25^{\circ}C$		2	100	mV
Quiescent Current	I_q	$T_J=25^{\circ}C$		4.3	8	mA
Quiescent Current Change	ΔI_q ΔI_q	$12.5V \leq V_I \leq 28V$			1	mA
		$5mA \leq I_O \leq 1A$			0.5	mA
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O=5mA$		-1		mV/ $^{\circ}C$
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		70		μV
Ripple Rejection	RR	$13V \leq V_I \leq 23V$, $f=120Hz$, $T_J=25^{\circ}C$	55	71		dB
Dropout Voltage	V_d	$T_J=25^{\circ}C$, $I_O=1A$		2		V
Output Resistance	R_O	$f=1KHz$		18		m Ω
Short Circuit Current	I_{SC}	$T_J=25^{\circ}C$		400		mA
Peak Current	I_{pk}	$T_J=25^{\circ}C$		2.2		A